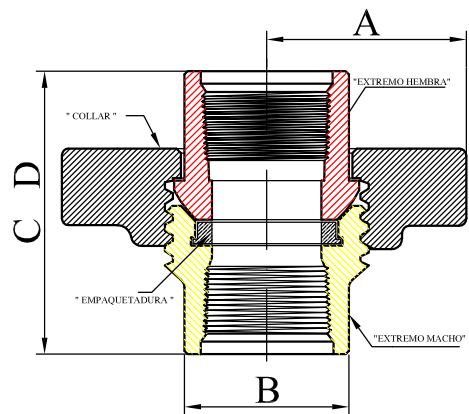


# Especificaciones Union Doble VITALMET

**Figura 1002**

| Medida nominal de la pieza                      | (in.)       | 2 | 3 | 4                               | 5                              |
|-------------------------------------------------|-------------|---|---|---------------------------------|--------------------------------|
|                                                 | <b>(mm)</b> |   |   | <b>100</b>                      | <b>125</b>                     |
| <b>A</b> Radio de despeje                       | (in.)       |   |   | 4 <sup>7</sup> / <sub>8</sub>   | 6 <sup>5</sup> / <sub>36</sub> |
|                                                 | <b>(mm)</b> |   |   | <b>124</b>                      | <b>156</b>                     |
| <b>B</b> Diametro exterior                      | (in.)       |   |   | 5 <sup>7</sup> / <sub>32</sub>  | 5 <sup>9</sup> / <sub>16</sub> |
|                                                 | <b>(mm)</b> |   |   | <b>133</b>                      | <b>141</b>                     |
| <b>C</b> Largo total de la pieza                | (in.)       |   |   | 8 <sup>1</sup> / <sub>4</sub>   | ---                            |
|                                                 | <b>(mm)</b> |   |   | <b>210</b>                      | ---                            |
| <b>D</b> Largo total para soldar (schedule 160) | (in.)       |   |   | 5 <sup>11</sup> / <sub>16</sub> | 6 <sup>3</sup> / <sub>4</sub>  |
|                                                 | <b>(mm)</b> |   |   | <b>144</b>                      | <b>171</b>                     |
| Paso rosca ACME                                 |             |   |   | 4                               | 3                              |
|                                                 |             |   |   | Standart                        | Standard                       |



**Figura 1003**

| Medida nominal de la pieza                      | (in.)       | 2 | 3 | 4                                | 5                              |
|-------------------------------------------------|-------------|---|---|----------------------------------|--------------------------------|
|                                                 | <b>(mm)</b> |   |   | <b>100</b>                       | <b>125</b>                     |
| <b>A</b> Radio de despeje                       | (in.)       |   |   | 5 <sup>3</sup> / <sub>4</sub>    | 5 <sup>3</sup> / <sub>4</sub>  |
|                                                 | <b>(mm)</b> |   |   | <b>146</b>                       | <b>146</b>                     |
| <b>B</b> Diametro exterior                      | (in.)       |   |   | 5 <sup>1</sup> / <sub>2</sub>    | 5 <sup>9</sup> / <sub>16</sub> |
|                                                 | <b>(mm)</b> |   |   | <b>140</b>                       | <b>141</b>                     |
| <b>C</b> Largo total de la pieza                | (in.)       |   |   | 10 <sup>15</sup> / <sub>16</sub> | ---                            |
|                                                 | <b>(mm)</b> |   |   | <b>278</b>                       | ---                            |
| <b>D</b> Largo total para soldar (schedule 160) | (in.)       |   |   | 10 <sup>11</sup> / <sub>16</sub> | 10 <sup>3</sup> / <sub>4</sub> |
|                                                 | <b>(mm)</b> |   |   | <b>271</b>                       | <b>273</b>                     |
| Paso rosca ACME                                 |             |   |   | 4                                | 4                              |
|                                                 |             |   |   | Standart                         | Standard                       |

**Figura 1502**

| Medida nominal de la pieza       | (in.)       | 1 | 2                               | 3                               | 4                              |
|----------------------------------|-------------|---|---------------------------------|---------------------------------|--------------------------------|
|                                  | <b>(mm)</b> |   | <b>50</b>                       | <b>80</b>                       | <b>100</b>                     |
| <b>A</b> Radio de despeje        | (in.)       |   | 3 <sup>29</sup> / <sub>32</sub> | 4 <sup>1</sup> / <sub>2</sub>   | 6                              |
|                                  | <b>(mm)</b> |   | <b>99</b>                       | <b>114</b>                      | <b>300</b>                     |
| <b>B</b> Diametro exterior       | (in.)       |   | 3 <sup>3</sup> / <sub>16</sub>  | 4 <sup>13</sup> / <sub>32</sub> | 5 <sup>3</sup> / <sub>4</sub>  |
|                                  | <b>(mm)</b> |   | <b>81</b>                       | <b>112</b>                      | <b>146</b>                     |
| <b>C</b> Largo total de la pieza | (in.)       |   | 7                               | 7 <sup>1</sup> / <sub>4</sub>   | 8 <sup>1</sup> / <sub>2</sub>  |
|                                  | <b>(mm)</b> |   | <b>170</b>                      | <b>184</b>                      | <b>216</b>                     |
| <b>D</b> Largo total para soldar | (in.)       |   | 6 <sup>1</sup> / <sub>4</sub>   | 5 <sup>1</sup> / <sub>4</sub>   | 10 <sup>1</sup> / <sub>2</sub> |
|                                  | <b>(mm)</b> |   | <b>159</b>                      | <b>133</b>                      | <b>267</b>                     |
| Paso rosca ACME                  |             |   | 3                               | 3 <sup>1</sup> / <sub>2</sub>   | 3                              |
|                                  |             |   | Standart                        | Standart                        | Standart                       |



Vitalmet s.a

Sitio web <https://www.vitalmetsa.com.ar/>