

Especificaciones Union Doble VITALMET

Figura 100

Medida nominal de la pieza	(in.)	2	3	4	6	8
	(mm)	50	80	100	150	200
A Radio de despeje	(in.)	3 ³ / ₁₆	4 ¹ / ₂	5 ⁵ / ₁₆	6 ¹⁵ / ₁₆	8 ⁷ / ₃₂
	(mm)	81	114	135	176	209
B Diametro exterior	(in.)	2 ³ / ₄	4	5 ³ / ₁₆	7 ⁵ / ₁₆	9 ¹⁵ / ₃₂
	(mm)	70	102	132	186	241
C Largo total de la pieza	(in.)	3 ⁵ / ₈	4 ⁷ / ₈	5 ³ / ₄	6 ²³ / ₃₂	7 ³ / ₁₆
	(mm)	92	124	146	171	183
Paso rosca ACME		3	3	3	3	3
		Modifica.	Modifica.	Modifica.	Standard	Standard

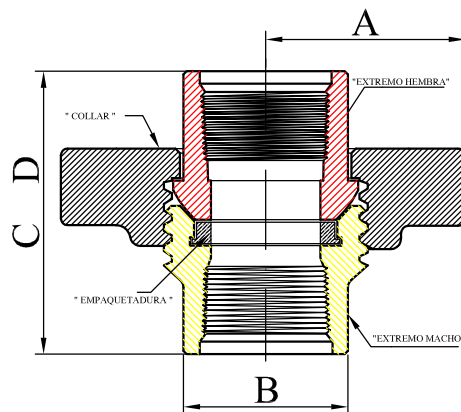


Figura 200 - 206

Medida nominal de la pieza	(in.)	2	3	4	6	8	10
	(mm)	50	80	100	150	200	250
A Radio de despeje	(in.)	3	4	4 ¹¹ / ₁₆	6 ¹ / ₄	7 ⁷ / ₁₆	9
	(mm)	76	102	119	159	189	229
B Diametro exterior	(in.)	2 ¹³ / ₁₆	4 ³ / ₃₂	5 ¹ / ₈	7 ¹ / ₂	9 ⁹ / ₁₆	11 ¹ / ₂
	(mm)	71	104	130	191	243	292
C Largo total de la pieza	(in.)	3 ¹ / ₄	4 ¹⁷ / ₃₂	4 ¹⁵ / ₁₆	6 ²¹ / ₃₂	7 ³ / ₁₆	9 ³ / ₃₂
	(mm)	83	115	125	169	183	231
Paso rosca ACME		4	4	3	3	3	3
		Standard	Standard	Modifica.	Standard	Standard	Standard

Figura 602

Medida nominal de la pieza	(in.)	1	2	3	4
	(mm)	25	50	80	100
A Radio de despeje	(in.)	2 ⁵ / ₁₆	3 ⁵ / ₈	4 ¹ / ₂	5 ³ / ₁₆
	(mm)	59	92	114	132
B Diametro exterior	(in.)	1 ³ / ₄	2 ³¹ / ₃₂	4 ⁵ / ₃₂	5 ⁷ / ₃₂
	(mm)	44	75	106	133
C Largo total de la pieza	(in.)	3 ¹⁷ / ₃₂	5 ¹ / ₂	6 ¹ / ₄	8 ¹ / ₄
	(mm)	90	133	159	210
D Largo total para soldar	(in.)	3 ¹⁷ / ₃₂	5 ³¹ / ₃₂	5 ¹¹ / ₁₆	5 ¹¹ / ₁₆
	(mm)	90	152	144	144
Paso rosca ACME		6	3	3	3
		Standart	Modifica.	Modifica.	Modifica.



Vitalmet s.a

Sitio web <https://www.vitalmetsa.com.ar/>